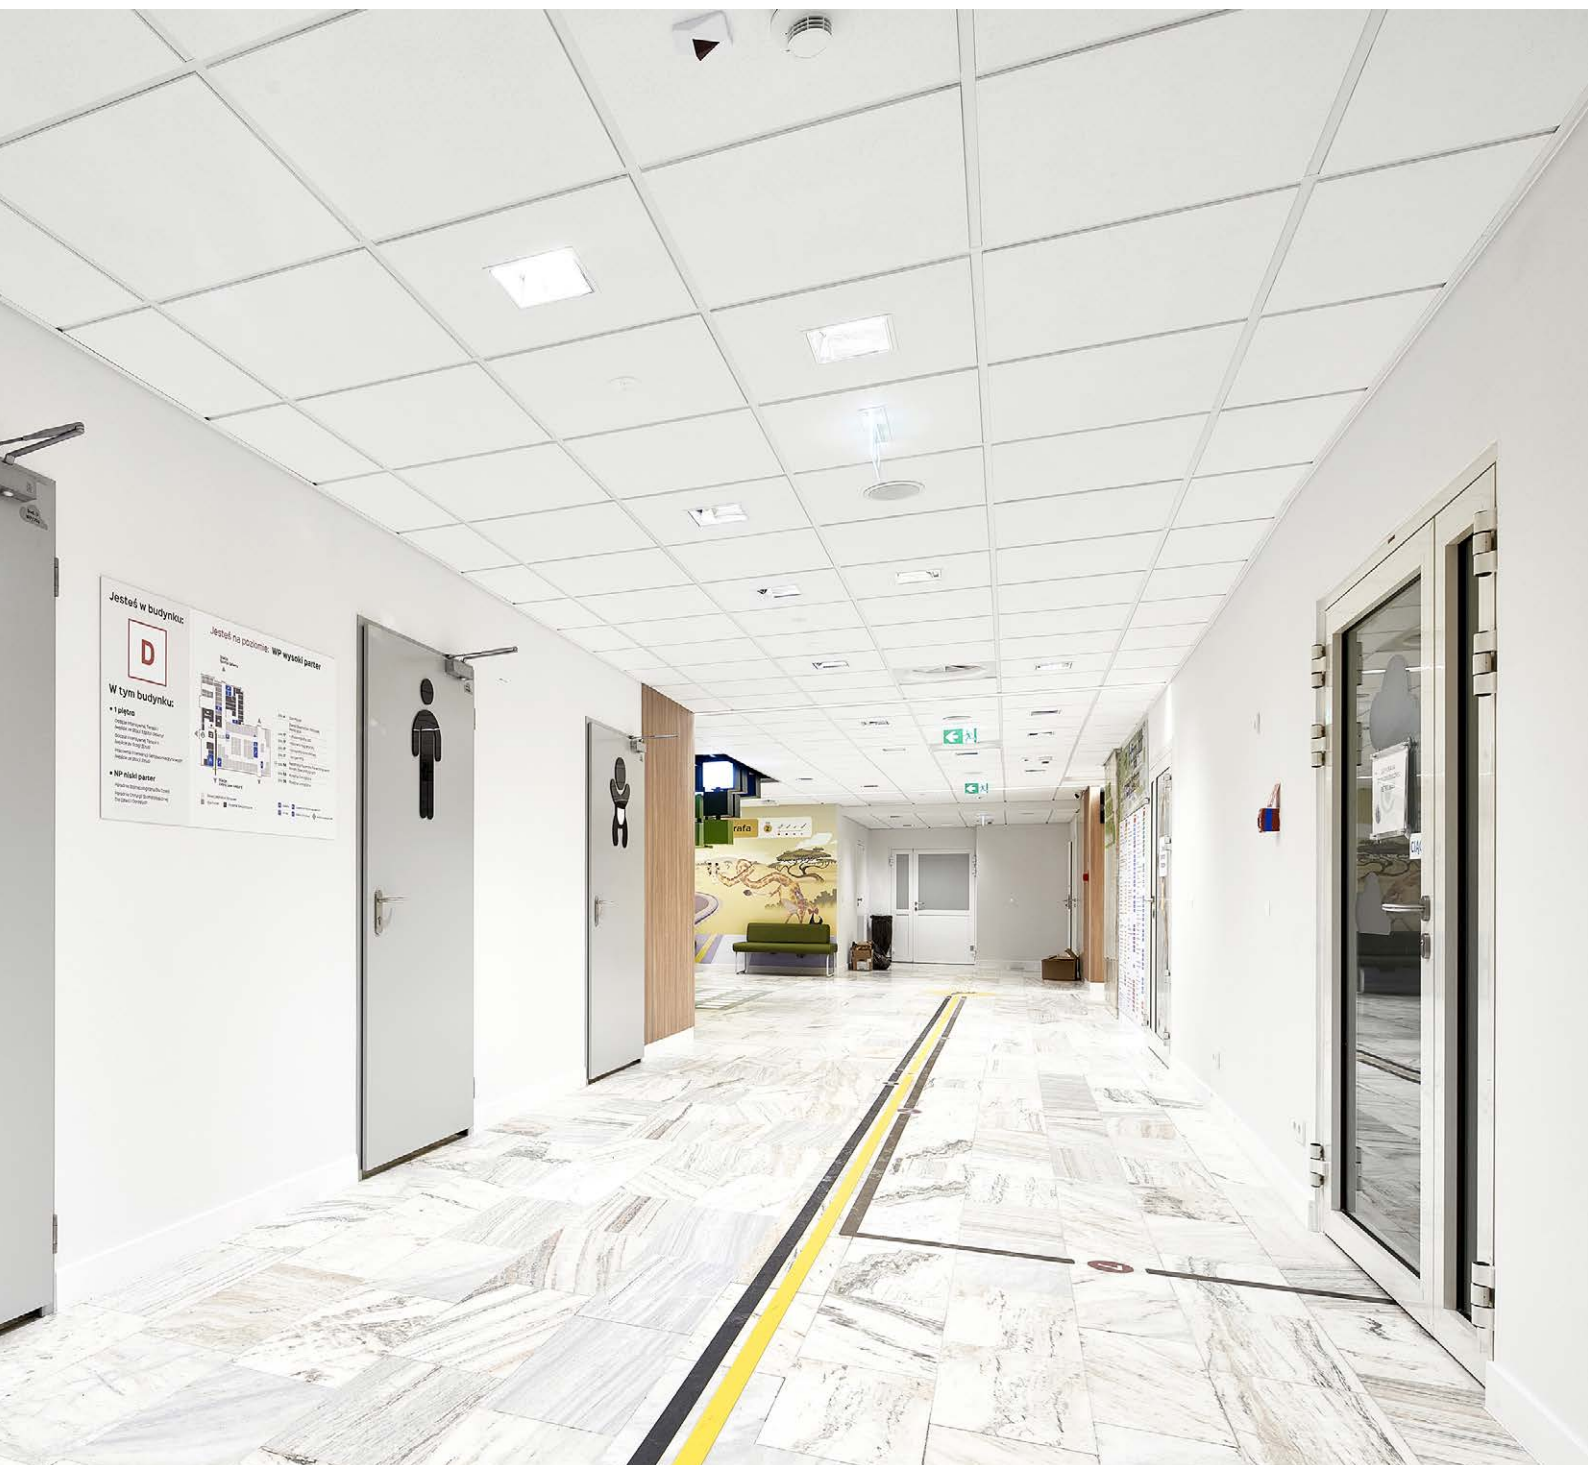


Rockfon MediCare® Standard



Rockfon MediCare® Standard





- Fulfills all standard cleaning and hygienic requirements for use in healthcare environments
- Does not contribute to the growth of MRSA and ensures low particle emission (ISO Class 5)
- High sound absorption and highest fire safety (Class A1)
- Basic range of tile dimensions in semi-concealed and visible grid options

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Painted edges

Application Area

- Healthcare

Edges	Module size (mm)	Weight (kg/m²)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m²)*
	600 x 600 x 15	2.0	Rockfon® System T15 A	40%	Bronze	2.31	2.78
	1200 x 600 x 15		Rockfon® System T15 A				
	600 x 600 x 15	2.0	Rockfon® System MediCare T24 A, E (ECR)	40%	Bronze	2.31	2.78
	1200 x 600 x 15		Rockfon® System T24 A Rockfon® System MediCare T24 A, E (ECR)				
	600 x 600 x 15	2.2	Rockfon® System T15 E	40%	Bronze	2.7	3.31
	1200 x 600 x 15		Rockfon® System Ultraline E Rockfon® System T15 E Rockfon® System Ultraline E				
	600 x 600 x 15	2.2	Rockfon® System T24 A, E ECR	40%	Bronze	2.7	3.31
	1200 x 600 x 15		Rockfon® System XL T24 E Rockfon® System T24 A, E ECR Rockfon® System XL T24 E				

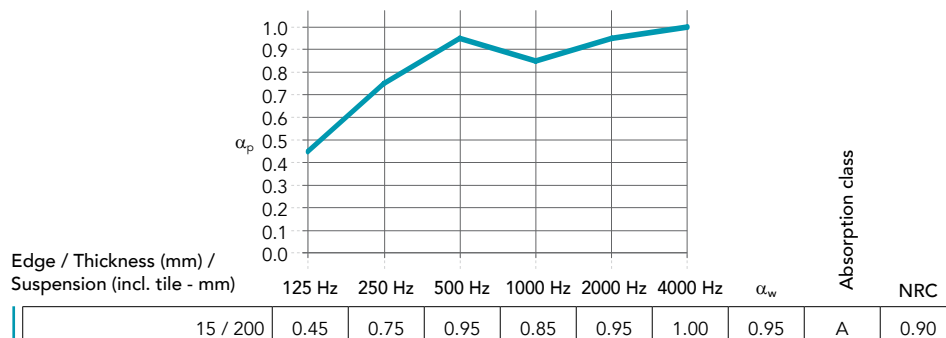
* For full environmental impact disclosure, see our product EPDs available on rockfon.link/int-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : 0.95 (Class A)



Reaction to fire
 A1



Light reflection
 86%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity.
 C/0N



Cleaning
 - Vacuum
 - Damp cloth



Hygiene
 Stone wool provides no sustenance to microorganisms
 Microbiological class M1 fulfilling the requirements of
 Zone 4 (very high risk) defined by NF S 90-351:2013.
 Tested with:
 - Methicillin Resistant Staphylococcus Aureus (MRSA)
 - Candida Albicans
 - Aspergillus Brasiliensis



Clean room
 ISO Class 5



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in
 accordance with EN 13964 (EN 717-1). Rockfon ceiling
 products have a very low release of VOCs. A selection
 of Rockfon products have achieved the following
 performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened
 against the list of substances restricted under REACH or
 recognized as Substances of Very High Concern (SVHC)
 on an ongoing basis. Rockfon stone wool fibres comply
 with the safe fibre EU regulation and hold an EUCEB
 certification.

Sounds Beautiful

